


Thermoplastic Polyurethane Water Resistant (TPU)

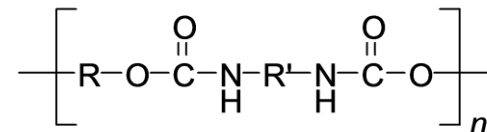

SPECIFICATIONS

Property	Spec	Value
Hardness	ISO 868	96A
Hardness	ISO 868	48D
Specific Gravity (g/cm ³)	ISO 1183	1.17
Tensile Strength (Mpa)	DIN 53504	50
Elongation at break	DIN 53504	500%
100% Modulus (Mpa)	DIN 53504	12
300% Modulus (Mpa)	DIN 53504	22
Tear Strength (kN/m)	DIN 53515	150
Abrasion (mm ³)	DIN 53516	15
Compression Set: 70°C, 24hrs, 25% deflection	ISO 815	30%
Compression Set: 100°C, 24hrs, 25% deflection	ISO 815	35%
Minimum Service Temp.		-37° C -35° F
Maximum Service Temp.		110° C 230° F
Maximum Service Temp. - Water		80° C 176° F
Color		Dark Gray

DESCRIPTION

MP25 is a TPU material with hardness 96 Shore A, specially compounded for low friction applications. The polyurethane polymer industry has enormous categories of products for a wide variety of applications. Polyurethane used in the seal industry is a thermoplastic elastomer (TPU). As the name suggests, it behaves like an elastomer but the chemistry is of a thermoplastic. The elasticity of a TPU is brought about through polymer morphology phase changes as in thermoplastics not through vulcanization as seen in other elastomers. Because of its thermoplastic nature, TPU has excellent tensile strength and abrasion resistance that other elastomers are unable to match. Meanwhile, TPUs also have good flexibility and shock absorbing performance. An additional advantage of TPUs is that they can be molded using conventional thermoplastic processes.