


Polytetrafluoroethylene (PTFE Polymer Filled)

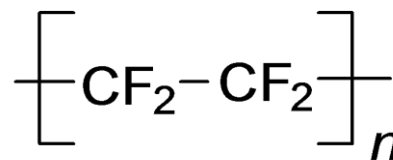

SPECIFICATIONS

Property	Spec	Value
Specific Gravity (g/cm ³)	ASTM D4745	2.02-2.08
Tensile Strength	ASTM D4745	2900 psi
Elongation	ASTM D4745	260%
Hardness (Shore D)	Needle Method	65-55
Bulk Density (g/lt)	ASTM D4745	600-700
Compressive Strength	DIN 53455	>1525psi
Coefficient of Thermal Expansion @ 77F - 392F	K-1 x 10-5	8.4
Coefficient of Friction steel, dry, 0.6m/s, p=0.05MPa, t=5h	μ	0.18
minimum service temp.		-328F
maximum service temp.		500F
Color		Natural

DESCRIPTION

MT72 is a PTFE material with hardness 65-55 Shore D, specially compounded with polymer fillers. Polytetrafluoroethylene (PTFE) has exceedingly strong carbon-fluoride bonds (C-F). PTFE has a simple, linear, flexible and regular molecular structure, which makes it highly crystalline. Commercial PTFE is a high molecular weight polymer. Fluorine atoms form a tight sheath of protection providing PTFE with extreme molecular and physical properties. The sheath prevents PTFE from external influences upon the carbon-carbon backbone. It also results in weak interactions/bindings between polymer chains. These molecular structure properties make PTFE extremely resistant to chemicals or solvents even at very high temperatures and high pressures. PTFE also has very low friction and good anti-stick characteristics. PTFE is tough and flexible even at very low temperatures. However the same molecular structure properties result in mediocre mechanical properties with low stiffness and strength among thermoplastics. PTFE articles cannot be formed with conventional processes for thermoplastics because it does not flow above its crystalline melting point. Parts can be formed by a sintering process under high temperatures.